

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB2004/005391

International filing date: 23 December 2004 (23.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0401069.0  
Filing date: 19 January 2004 (19.01.2004)

Date of receipt at the International Bureau: 24 January 2005 (24.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 


Dated 14 January 2005

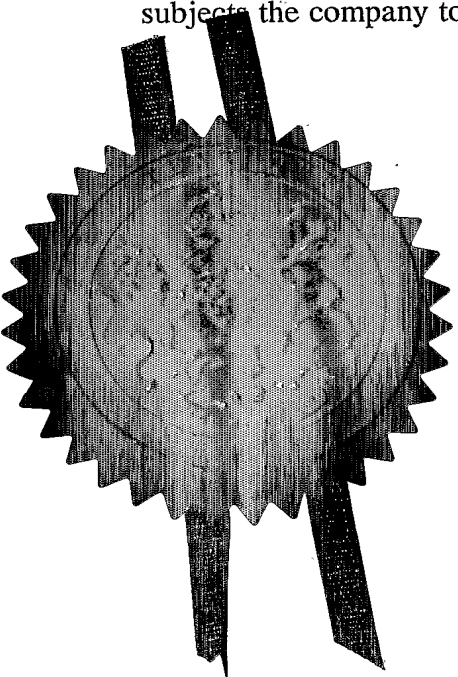



# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office if you fill in this form)

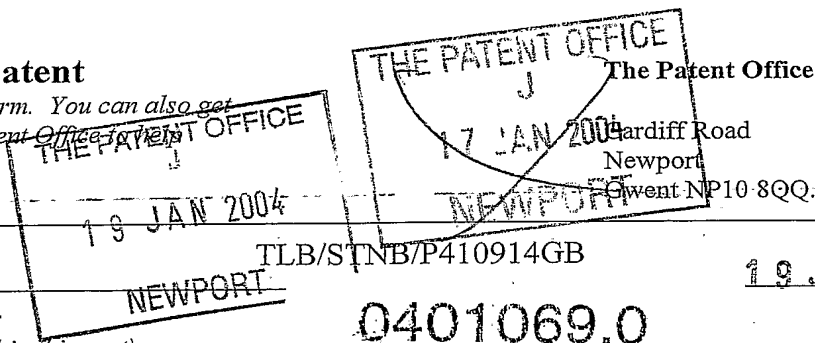

1. Your reference  
2. Patent application number  
(The Patent Office will fill in this part)

TLB/STNB/P410914GB  
**0401069.0**  
19 JAN 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

**KENNEDY, Roger**  
152 Bury New Road,  
Whitefield,  
Manchester,  
M45 6AD.

Patents ADP number (if you know it)

8780009001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

APPARATUS FOR CHEMICAL OR BIOLOGICAL REACTIONS

5. Name of your agent (if you have one)

**W. P. THOMPSON & CO.**

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Coopers Building,  
Church Street,  
Liverpool L1 3AB

Patents ADP number (if you know it)

0000158001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these

Country Priority application number Date of filing  
(if you know it) (Day/month/year)

earlier applications and (if you know it) the or each application number

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application Date of filing  
(Day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'yes' if:

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)

NO

9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 13

Claims(s) 4

Abstract 1

Drawing(s) 4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination  
*Patents Form 10/77*

Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application

Signature

Date 16/01/2004

W.P. Thompson

12. Name and daytime telephone number of person to contact in the United Kingdom S.T.N. BRADBURY.  
0151-709-3961

#### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

#### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' *Patents Form 7/77* will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION  
APPARATUS FOR CHEMICAL OR  
BIOLOGICAL REACTIONS

The present invention relates to an apparatus for use in conducting chemical or biological reactions involving the input of fluid reagents and/or the production of fluid products.

Standard chemical and biological reactors are often used for a number of different reactions types and are often constructed for general applications. Many reactors for commercial use have been developed in order to increase efficiency and assist in high throughput of reagents to produce the required product. Standardized reactors are often more than adequate for applications whereby a reaction takes place in a purely liquid phase. However a number of chemical biological reactions require the input of fluid materials such as gaseous reagents into a reactor in order that a suitable reaction can occur. The resultant product or products from the reaction may also result in a fluid material which may be in a gaseous state. Standardized reactor vessels are not appropriate for some reactions as more specialist reactor vessels may be required due to the extra pressure constraints on the vessel etc.

There is therefore a need for a reactor vessel which can be used to mix a number of reagents together and allow at least one reagent to be in a substantially fluid form, it would also be advantageous for such a vessel to allow for the addition of a fluid material reagent that easily disassociates with other fluid material reagents or recondenses easily should it be vaporized or atomized prior to entry to the vessel. When such a fluid material reagent disassociates or recondenses, it can lead to an

inefficient reaction in addition to leaving residues on certain parts of the reaction vessel which will require post reaction cleaning etc. Furthermore, an inefficient reaction vessel may also lead to impurities in the final product and waste gases and exhaust fumes from the reactor vessel may also have high concentrations of reagent which may be potentially dangerous. Indeed, a reaction vessel often requires expensive modifications or additional apparatus in order to further process waste fluid materials/exhaust fumes from a reactor should it be dangerous and/or laden with particulate matter which cannot be immediately expelled into the environment.

It is an object of the present invention to provide an apparatus for conducting chemical or biological reactions which is capable of processing one or more fluid reagents and/or expelling one or more fluid products. It is also an object of the present invention in order to provide an apparatus which alleviates one or more of the above identified problems associated with the prior art reactors.

In accordance with the present invention there is provided an apparatus for use in conducting chemical or biological reactions which require the input of at least one fluid reagent and/or the output of at least one fluid product, the apparatus comprising a reaction chamber connected to an inlet or an outlet, the inlet or outlet having a regulator with a perforated element capable of allowing passage of fluid material therethrough, and optionally a propeller connected to a power supply for driving the propeller. The present invention therefore provides an apparatus which can accommodate a reagent which comprises a fluid material (preferably in a substantially gaseous phase), which may include reagents which may disassociate from one another quickly whilst in a fluid form and also those reagents which may

recondense having previously been vaporized or atomized before entry into the inlet. Equally, the apparatus can also accommodate fluid material which emanates from the reactor and/or exhaust gases which may be produced as a by product of the reaction process.

Preferably, there are at least two perforated elements. A first perforated element may be disposed in a region upstream of the propeller and a second perforated element may be disposed in a region downstream of propeller. The perforated element and/or propeller may be heated by a heating means and such a heating means may be connected directly to the perforated element or propeller or alternatively may be connected indirectly. For example, should the heating means be connected directly, the perforated element may have heating elements embedded within it or indeed the perforated element may act as a heating element in itself upon the application of an electrical current. Similarly, the propeller may have heating elements embedded or disposed on or in the propeller and again an electrical current may be applied in order to heat the propeller. Should either the perforated element or the propeller be heated indirectly, this may be by means of heat transduction or conduction through elements which can conduct heat or from the heating element located up stream of an inlet or outlet. Preferably, the means for heating comprises an electrical power supply and/or thermal conduction. Additionally, the heating means may be a heating coil disposed either externally or internally to the inlet or outlet. Commonly, an inlet or outlet will be a tube or similar structure. The perforated element and propeller may have dimensions which conform substantially to the dimensions of the inlet or outlet tube or alternatively may be slightly smaller



and may have means for fixing both the propeller and the perforated element to the inlet or outlet.

The perforated element may additionally be rotatable about a shaft and such a rotation may or may not be in conjunction with the propeller. The rotation of the perforated element may be in an opposing direction to that of the propeller or alternatively it may rotate in the same direction. The rotation of propeller may have similar or differing speed as the perforated element. The propeller may comprise a plurality of vanes in the shape substantially of a semi-circle, a tear drop, a half tear drop, a bellcurve, a half bellcurve, a rectangle, a triangle and variations thereof. The heat and/or speed of the propeller and/or perforated element may be controlled by an electronic control unit (ECU). It will be evident to one skilled in the art, that such an ECU can be used in order to control the reaction process in the reaction vessel and may be capable of assimilating information from sensors which can be disposed at one or more positions throughout the apparatus. Such an ECU will commonly be used in conjunction with a user interface such as a computer in order that results of the reaction process and control of the reaction process can be easily administered. The propeller may be produced from a composite of a heat conductive material and a non-heat conductive material. The axis of the propeller may be substantially in alignment with the longitudinal axis of the inlet or outlet but may alternatively be at an angle of  $0.5^{\circ}$  to  $60^{\circ}$  with respect to the longitudinal axis of the inlet or outlet. Preferably, the angle of the propeller is between  $10^{\circ}$  and  $45^{\circ}$ . The perforated element may comprise a gauze and the exact size gauze and material used will be dependent upon the exact chemical or biological reaction. Preferably, the perforated element is

aligned perpendicular to the longitudinal axis of the inlet or outlet, but alternatively the perforated element may be disposed at an angle to the inlet or outlet wall in the range of  $1^{\circ}$  to  $25^{\circ}$ . More preferably, the perforated element is disposed at an angle of in the range of  $5^{\circ}$  to  $20^{\circ}$ .

The fluid reagent used in the apparatus may comprise two reagents which quickly disassociate from one another and therefore after the initial mixing prior to insertion of the mixture into the inlet, the propeller and perforated element arrangement helps to ensure that the two reagents are maintained in a homogeneous mixture. The fluid reagent may also comprise at least one reagent which reverts to a solid or liquid state and may comprise only one reagent in certain reactions. Preferably, the reagent is converted into a substantially gaseous state by atomization or vaporization. The substantially gaseous product may comprise exhaust gases from the reaction but may also have a gaseous product mixed with a waste product which requires further processing.

The regulator of the apparatus when located in the outlet may further comprise a portion which is charged so as to attract and collect particulate matter from the liquid product. Such a portion may be charged by means of two electrodes which are able to attract charged particles. The regulator may further comprise a filter to collect the particulate matter and a suction means may be attached to the filter in order to attract additional particulate matter to the filter. Yet an additional portion may also be provided in the regulator for liquefying gaseous material should it be present in the product and again a suction means may be attached to the portion in order to attract the gaseous material to be liquefied therein. The liquefying portion

may liquefy material by a number of means but will commonly employ a cooling fluid or path cooled by a cooling fluid such as liquid nitrogen in order to achieve its goal.

Accordingly, the invention provides an induction regulator for a chemical or biological reactor, the regulator comprising a propellor and means for mounting the propellor adjacent an inlet port of the reactor for regulating the dispersion of gaseous materials supplied to the reactor.

The invention further provides a method for conducting a chemical or biological reaction comprising supplying a number of gaseous reagents to a reaction chamber and dispersing those reagents in the chamber by means of a driven propellor mounted in the chamber.

The invention also provides a chemical or biological reactor comprising a reaction chamber having at least one inlet for the supply of a gaseous reactant material, and a driven propellor mounted in the region of the inlet for regulating the distribution of the gaseous reactant material in the reaction chamber.

The invention also provides a chemical or biological reactor comprising a reaction chamber having at least one inlet for the supply of a gaseous reactant material, and a driven propellor mounted downstream of the inlet in the reactant flow path for regulating the distribution of the gaseous reactant material in the reaction chamber.

The invention also provides a chemical or biological reactor comprising a reaction chamber having at least one inlet for the supply of a gaseous reactant material, and a driven propellor mounted immediately downstream of the inlet in the

reactant flow path for regulating the distribution of the gaseous reactant material in the reaction chamber.

A specific embodiment of the present invention will now be described by way of example only, with reference to the accompanying figures:

Figure 1 shows a regulator with one propeller and two perforated elements in accordance with the present invention;

Figure 2 is a diagram of a regulator in accordance with the present invention comprising a propeller, a perforated element and a heating coil;

Figure 3 is a diagram of a regulator in accordance with the present invention having one propeller and two perforated elements;

Figure 4 is a diagram of a regulator in accordance with the present invention having a propeller and two perforated elements;

Figure 5 is a plan view of a propeller as used in a regulator in accordance with the present invention;

Figure 6 is an embodiment of a propeller as used in a regulator in accordance with the present invention;

Figure 7 shows a schematic diagram of a propeller and perforated element forming a regulator located in an inlet in accordance with the present invention;

Figure 8 is a diagram of a regulator in accordance with the present invention used in an outlet .

With reference to Figure 1, there is provided a regulator for placement in an inlet of a chemical reactor comprising a first perforated element 10 located towards the fluid reagent supply 12 (located upstream) and a second perforated element 14

located towards the reaction chamber (located downstream). The regulator also has a shaft 16 to which a propeller 18 is attached and which is capable of rotating via a motor 20. The propeller 18 has two metallic strips located thereon which are capable of either being used as heating elements or capable of heat transduction so as to warm the fluid reagent(s) 12 and air mixture if required. The propeller 18 is also made from a resin material 24 to which the metallic strips 22 are adhered to or impregnated. The second perforated element 14 may be capable of rotation via motor 20 and also comprises a heating coil 26 which can again be used to heat the gaseous reagent 12. The rotation of the shaft 16 and heating of the metallic strip 22 and coil 26 is controlled by an electronic control unit 28 which can be configured by an interface unit 30. The ECU unit 28 can also vary the rotation of the shaft 16 in accordance to parameters received by an indicator 32 which relays data regarding the conditions of the reaction back to the ECU.

With reference to Figure 2, there is provided a regulator with one perforated element 50 and a propeller 52 made out of an appropriate material. The motor 54 powers the propeller 52 via an instrumentation or electronic control unit 56. Power to rotate the propeller 52 is provided by a battery/power supply (such as AC/DC current) 58 and a heating coil 60 is also provided in order to warm the fluid reagent in order to assist atomization and/or vaporization.

With reference to Figure 3, there is provided a regulator with a propeller 70 powered by a motor 72. Two perforated elements 74 are found towards the reaction chamber end of the inlet and therefore the gaseous reagents are mixed by the propeller 70 prior to penetrating both perforated elements 74.

With reference to Figure 4, there is provided a regulator with a propeller 90 disposed between a first perforated element 92 and a second perforated element 94. An injector 96 injects the gaseous reagent into the inlet and this reagent is either atomized or vapourised prior to penetrating the first perforated element 92 and reaching the propeller 90 and then penetrating perforated element 94 prior to reaching the reaction chamber.

With reference to Figure 5, there is provided a propeller blade 100 which comprises a heat/electric current conducting strip 102 which is either bonded onto a resin blade 104 or impregnated in the resin blade 104. The metallic strip 102 may act as a heating means by transferring heat from other parts of the regulator to the gaseous reagent or alternatively may be used as a heating element itself by connecting it to a power source such as a mains supply or a battery supply.

With reference to Figure 6 there is provided a propeller blade 110 of an elliptical shape produced wholly from a heat transducing material or a resin material capable of withstanding exposure to reagents and products of a number of reactions. A number of materials can be employed in the manufacture of the blades, but commonly they will be of an inert material. The blade has a spindle 112 through which a shaft can be placed and the propeller rotated.

With reference to Figure 7, there is provided a regulator placed inside an inlet 120 whereby the propeller 122 is positioned at an angle of approximately  $30^\circ$  in the inlet tube and has a motor 124 which powers the propeller 122 if appropriate. A perforated element 126 is disposed at an angle of  $12^\circ$  in the tube that forms the inlet of the reaction apparatus.

With reference to Figure 8, there is provided a regulator for use in an outlet comprising a propeller 140 which is rotatable via a motor 142. A portion of the regulator has a charging unit 144 capable of charging the fluid material (such as emitted gas) from the reaction chamber in order to attract heavy particles. The charging device also has a collection part which is capable of storing particles of which have been attracted by the charging unit 144. A perforated element 146 is also provided which is heated and thus can burn excess gaseous material if required. The fluid material (including exhaust gases) can then pass to a filter 148 which has a suction pump 150 attached in order to filter particulate matter from the exhaust gases. Furthermore, liquefying device 152 is also provided again with a suction pump 154 for liquefying certain gases should it be required in order to reduce the emissions of the exhaust or indeed to refine the product of the reaction. The resultant fluid material gases 156 can then either continue into a further processing device such as a catalytic reactor or out into the environment depending on the reaction being conducted. The device attached to the outlet can be placed either before or after the catalytic reactor should one be fitted to the reactor.

When the regulator is used in conjunction with an inlet, it will be most commonly controlled by an electronic control unit 28 which can be programmed by a interface unit 30 which ultimately controls the motor 20, 54 and 72. Therefore the rotation of the propeller 18, 52, 70, 90, 100, 110 will be dictated by engine speed and engine load in addition to a number of other variables. The ECU 28 will also determine the correct rotation after assessing information and in conjunction with use of an injector 32, 96 or vaporizer (or similar device) if fitted. A number of differently

shaped propellers 18, 52, 70, 90, 100, 110, 122 can be used and most commonly it will be in the form of an elliptical shape, a teardrop shape a bell shape or variations thereof. The propeller 18, 100, can be used as a heating element in order to heat the gaseous reagent when in the regulator and this can be via metallic strips 22, 102 which act as heating elements or act to dissipate the heat throughout the regulator. The ECU unit 28 also controls the speed by which a perforated disc 10, 14, 50, 74, 92, 94, 126 can rotate. The ECU can also control the heating of the element and such an element may in itself be used as a heating element or have a heating element embedded therein. Alternatively, a separate heating element 26 or 60 can be placed in the regulator and this may or may not be connected near to a perforated element as show in Figure 1. The propeller 18, 52, 70, 90, 100, 110 and 102 can be angled depending on the size and the curvature of the inlet and indeed can be angled relative to the axis of the inlet or outlet tube depending on the application. The propeller can be placed in any position in the inlet or outlet such that it is located in between the two perforated elements, before a perforated elements, after a perforated element and indeed next to or adjacent to an injector or vaporizer.

The action of the rotating propeller and/or perforated element which can be heated and can provide for a homogenous mixture of reagents for use in the reaction chamber (not shown). Additionally, should the regulator be used in an outlet, it will greatly aid removal of products and waste materials and may also assist in re-vaporising condensed gaseous material etc. Therefore, the combination of the propeller and the perforated element greatly improves efficiency. Any crevice in the inlet which stores unutilised reagent can be cleaned by the gas pressure the propeller



creates a pressure on the reaction chamber as the pressure builds up in the inlet, helping to remove unutilised reagent and thus cleaning the inlet. The propeller also helps to increase the efficiency of the reactor as turbulence is increased in the reagent prior to entering the reaction chamber. The provision of heating the perforated element assists in mixing of the gaseous reagent and the elevated temperatures also assist in the reactor starting from cold should the reactor take time to "heat up" and reach its maximum efficiency.

The propeller need not be used continuously and can be turned on and off according to when a reagent enters the inlet and may be used in conjunction with the perforated element as this will greatly reduce the energy consumption of the regulator and therefore be more efficient. The reactor may be used in a continuous or batch wise manner.

The propeller may be of a number of configurations but will commonly comprise 3 to 10 vanes. The perforated element can be a mesh or similar device and its mesh size will be dependent upon a given reaction.

With regard to the regulator being used in the outlet, the main principles regarding the workings of the regulator remain similar to the working of the regulator in an inlet, whereby the propeller 140 and the motor 142 can be controlled by an electronic control unit, as does the operation of the perforated filter 146. The perforated filter can be capable of adjustment at any angle or indeed rotated in unison or separately from the propeller 140. Additionally, there is provided a charging device 144 which is electrically charged with two electrodes which when activated can attract large particles from the product or exhaust gas emissions from

the reaction (or mixture of both) and stored for future disposal or removal. Furthermore, a particulate bag 148 can also be used in conjunction with a suction pump 150 in order to remove further particulate matter via employing a similar device to that of a vacuum cleaner wherein a suction is made to an area (part of the outlet) which can store and attract particulate matter which is not being collected by the charging device. Additionally, a liquefying device 152 again employing a suction pump 154 can also be used in order to liquefy gases should it be required. Such a device may be used if the product is in a gaseous form and can be isolated by this method. Alternatively, the device can be used to freeze certain gaseous compounds which may be potentially dangerous to the environment. The exact means by which the device liquefies gas may be by means of liquid nitrogen or a similar cooling agent.

It will be evident that a reagent may comprise one or more reagents which are mixed together. Alternatively, a reagent(s) may be mixed with air or an inert carrier for the purposes of the reaction.

The regulator for use in either the inlet or the outlet can be installed as an integral part of the manufacture of the or indeed the chemical or biological reactor. However, they may also retro-fitted to existing reactors. In either case, the regulators can be manufactured as single sealed units to facilitate easy installation.

CLAIMS.

1. An apparatus for use in conducting chemical or biological reactions requiring the input of at least one fluid reagent and/or the output of at least one fluid product, the apparatus comprising a reaction chamber having an inlet for the supply of at least one reactant and an outlet for the recovery of at least one product, the reaction chamber being provided with a regulator comprising a propeller mounted in the reaction chamber in the region of the inlet for dispersing the at least one reactant in the reaction chamber.
2. An apparatus as claimed in claim 1, wherein the regulator is provided with a perforated element capable of allowing the passage of fluid material therethrough.
3. An apparatus as claimed in claim 2, wherein the perforated element is disposed upstream of the propeller.
4. An apparatus as claimed in claim 2 or claim 3, wherein the perforated element is disposed downstream of the propeller.
5. An apparatus as claimed in any one of claims 2 to 4, wherein the perforated element is rotatable.
6. An apparatus as claimed in any one of claims 2 to 5, wherein the perforated element is aligned perpendicular to the longitudinal axis of the inlet or outlet.
7. An apparatus as claimed in any of claims 2 to 6, wherein the perforated element is disposed at an angle to the inlet or outlet wall in the range of  $1^{\circ}$  to  $25^{\circ}$ .
8. An apparatus as claimed in any preceding claim, wherein the perforated element and/or propeller is heated by a heating means.

9. An apparatus as claimed in claim 8, wherein the means for heating is connected directly to the perforated element or propeller.

10. An apparatus as claimed in claim 8 or claim 9, wherein the means for heating comprises an electrical power supply and/or thermal conduction.

11. An apparatus as claimed in any preceding claim, wherein the regulator is heated by means of a heating coil disposed externally or internally of the inlet or outlet.

12. An apparatus as claimed in any preceding claim, wherein the propeller is connected to a power supply for driving the propeller.

13. An apparatus as claimed in any preceding claim, wherein the propeller comprises a plurality of veins in the shape of substantially a semi-circle, a tear drop, a half tear drop, a bellcurve, a half bellcurve, a rectangle, a triangle and derivatives thereof.

14. An apparatus as claimed in any preceding claim, wherein the heat and/or speed of the propeller and/or perforated element is controlled by an electronic control unit.

15. An apparatus as claimed in claim 14, wherein the electronic control unit is capable of receiving data from sensors disposed at one or more positions in the apparatus.

16. An apparatus as claimed in any preceding claim, wherein the propeller is a composite of a heat conductive material and a non-heat conductive material.

17. An apparatus as claimed in any preceding claim, wherein the axis of the propeller is substantially in alignment with a longitudinal axis of the inlet or outlet.

18. An apparatus as claimed in any preceding claim, wherein the axis of the propeller is between  $0.5^{\circ}$  to  $60^{\circ}$  with respect of a longitudinal axis of the inlet or outlet.
19. An apparatus as claimed in any preceding claim, wherein the perforated element comprises a gauze.
20. An apparatus as claimed in any preceding claim, wherein the fluid reagent comprises two reagents which quickly disassociate from one another.
21. An apparatus as claimed in any of claims 1 to 17, wherein the fluid reagent comprises at least one reagent which reverts to a solid or liquid state quickly.
22. An apparatus as claimed in any of claims 1 to 17, wherein the reagent is converted to a substantially gaseous state by atomization or vaporization.
23. An apparatus as claimed in any preceding claim, wherein the substantially fluid product comprises exhaust gases from the reaction.
24. An apparatus as claimed in claim 23, wherein the fluid product is mixed with waste products and requires further processing.
25. An apparatus as claimed in any preceding claim, wherein the regulator further comprises a portion which is charged so as to attract and collect particulate matter from gaseous products.
26. An apparatus as claimed in any preceding claim, wherein the regulator further comprises a filter to collect particulate matter from gaseous products.
27. An apparatus as claimed in claim 26, wherein a suction means is attached to the filter.
29. An apparatus as claimed in any preceding claim, wherein the regulator

further comprises a portion for liquefying gaseous material from the gaseous product.

30. An apparatus as claimed in claim 29, wherein a suction means is attached to the portion for liquefying gaseous material.

31. An apparatus with a regulator substantially as herein described with reference to and as illustrated in the accompanying Figures.

ABSTRACT

APPARATUS FOR CHEMICAL OR  
BIOLOGICAL REACTIONS

The present invention relates to a apparatus for use in conducting chemical or biological reactions requiring the input of at least one fluid reagent and/or the output of at least one fluid product, the apparatus comprising a reaction chamber connected to an inlet or an outlet, the inlet or outlet having a regulator with a perforated element capable of allowing the passage of liquid material therethrough, and a propeller connected to a power supply for driving the propeller.

G:\CLIENT\410-420\KAA7\410914\GB\MASTER.WPD

[Figs.]

1/4

Figure 1


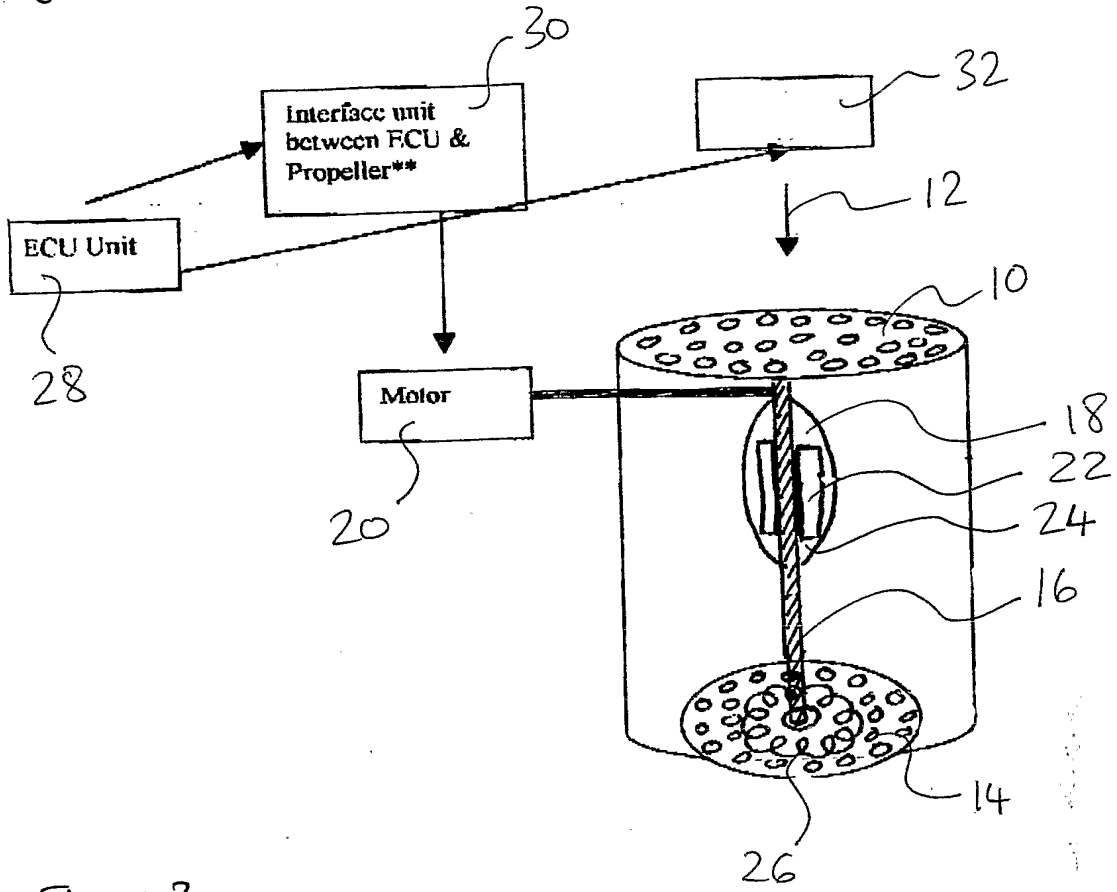


Figure 2





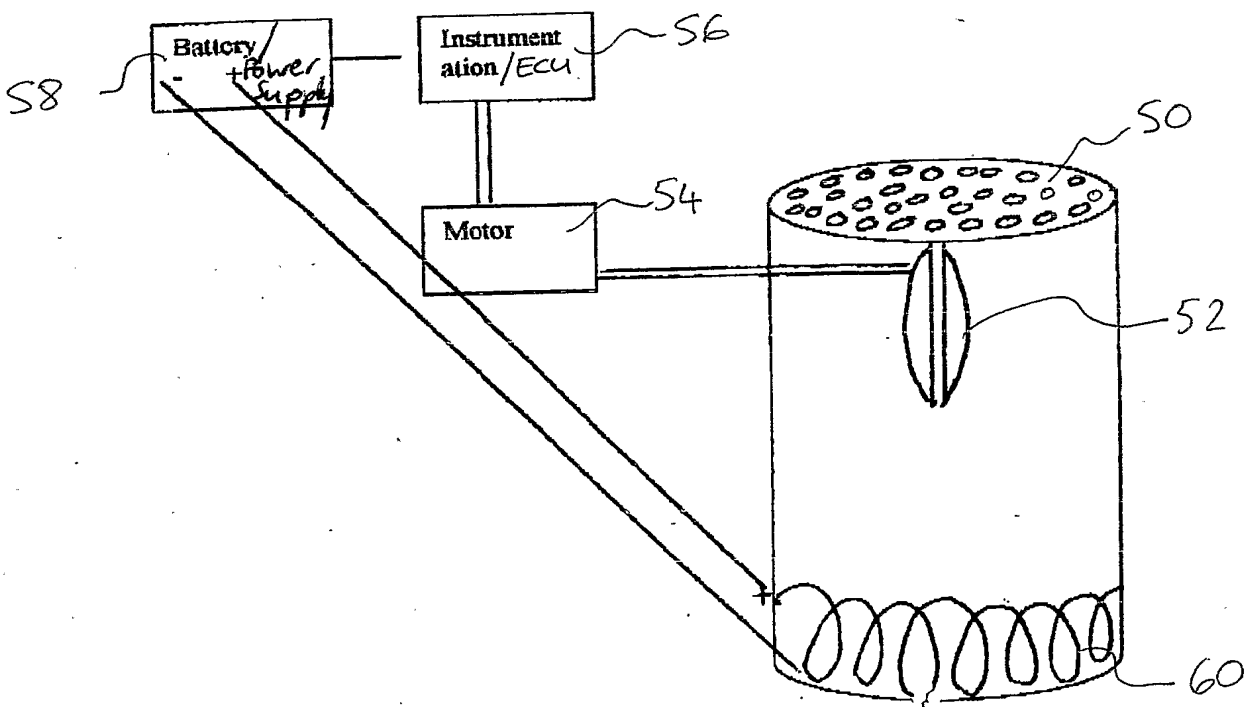

2/4

Figure 3


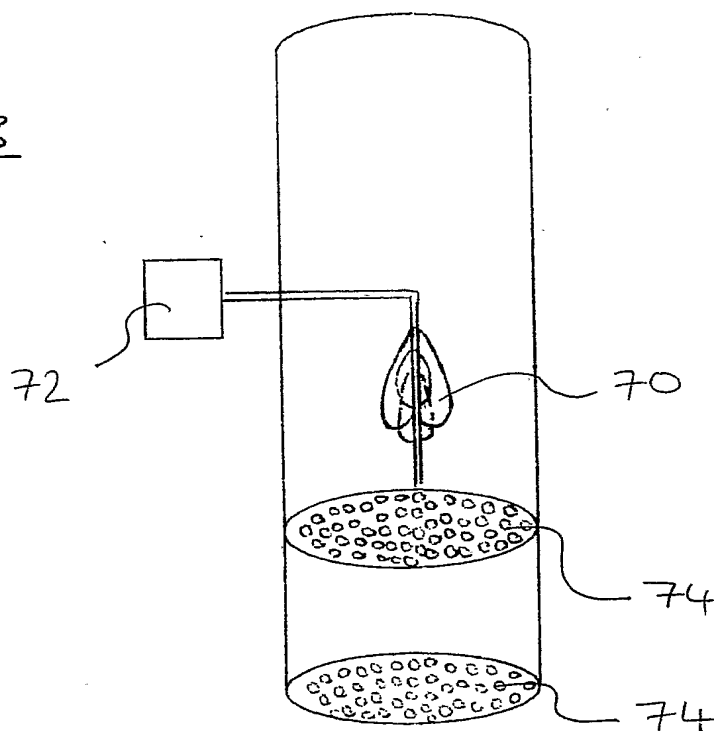


Figure 4



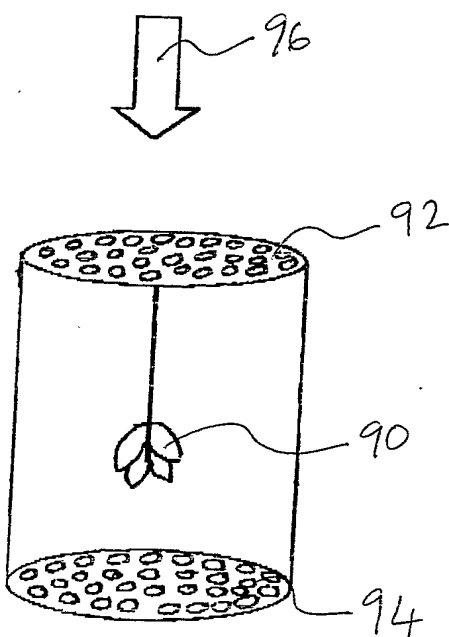

3/4

Figure 5

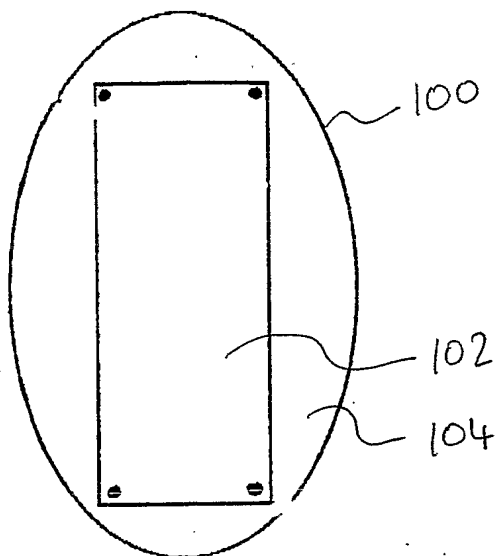


Figure 6


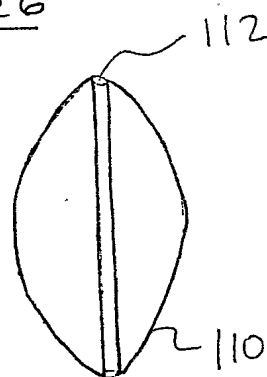


Figure 7



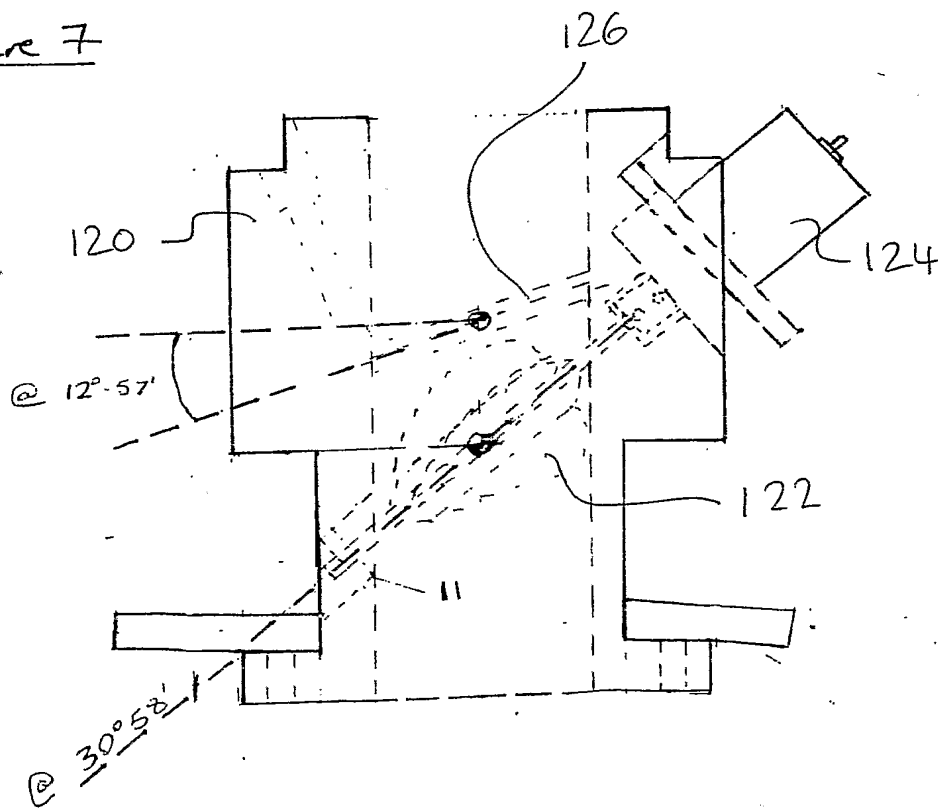

4/4

Figure 8

